




Display Mounting Arm Installation Instructions

**2022.5-2025 GM 1500
2024-2025 GM 2500/3500**

Installation of Display Mounting Arm

Included Materials

2022.5-25 GM 1500, 2024-25 GM 2500/3500

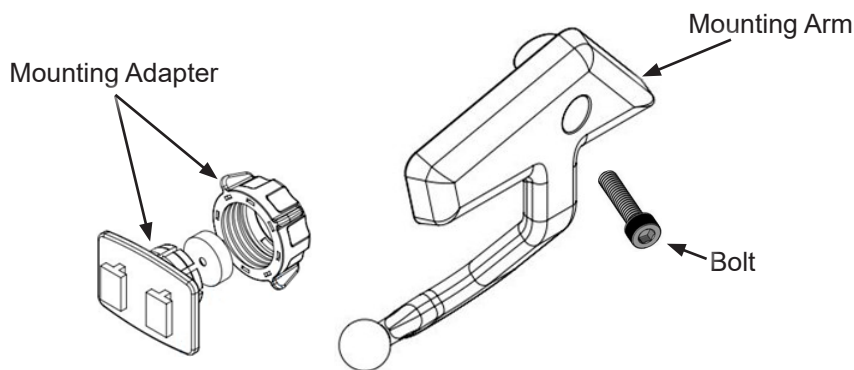

Required Tools

- 10mm 1/4" Drive Socket
- 1/4" Drive Extension
- 1/4" Drive Socket Wrench
- Trim Tool
- 5mm Allen Wrench

Installation

STEP 1 - On the driver's side A-pillar grab handle, carefully remove the plastic cover by prying it loose with a trim tool.

STEP 2 - Remove the exposed 10mm bolt. Keep the cover and bolt should you wish to return the vehicle to stock.

STEP 3 - Insert the provided bolt through the mounting arm.

Installation Cont'd

STEP 4 - Insert the mounting arm into the hole and use an Allen Wrench to tighten the bolt into the pillar.

STEP 5 - Remove the dual tab and nut (black plastic parts) from the bag. If the dual tab and nut are screwed together, unscrew them slightly from one another until the nut moves freely.

STEP 6 - Snap the nut and dual tab over the ball on the mounting arm and tighten the nut (if the nut won't go onto the ball, the tab and nut may need to be unscrewed further).

STEP 7 - Attach your device to the dual tab and secure the cord. Adjust the device position using the dual tab/nut.

BEFORE



AFTER



For additional questions not found in the user guide, call:

Holley Technical Support: (888)-360-3343

Monday - Friday, 8:00 am - 5:00 pm MST

**To expedite your support call, please have your Vehicle Information,
Part Number, and Serial Number ready prior to calling Technical Support.**

Holley[®]
TUNING GROUP

Copyright © 2025 Holley Inc. and subsidiaries. All rights reserved.

D10033800 Rev00 01/09/2025